

Instructions



DOUBLE TAP_{IND}

Know Your Limits - KYL Steel Targets

Part Number

TS-KYL-RIM & TS-KYL

Tools Required

- **3/16" Allen Wrench**

FIG 1.



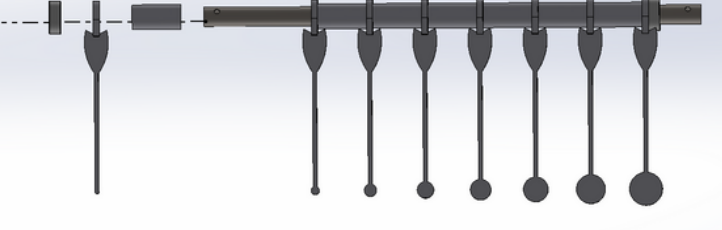


FIG 2.

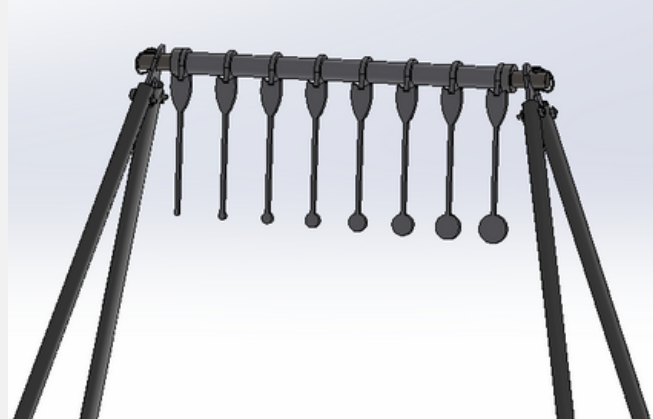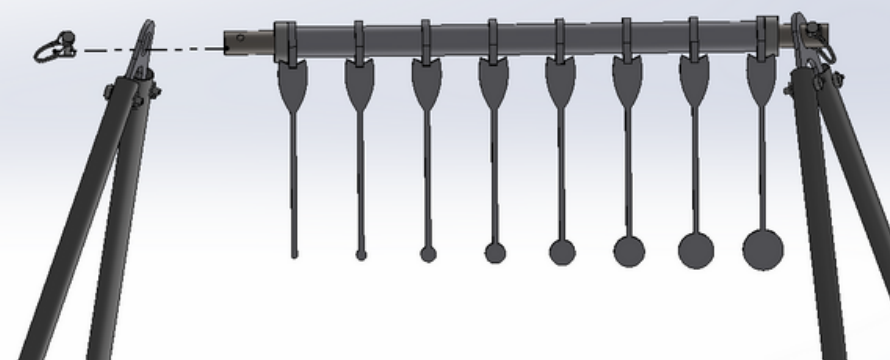

Note** Paddle Sizes and Spacer Tubes will be larger for Non Rimfire Kit. Images shown are the Rimfire version. **

Assembly Steps: Complete Assembly w/ Stand

1. Slide the targets onto the conduit crossmember, separating each with one black spacer. **FIG 1**
2. On each end of the crossmember, slide on a locking collar and use an Allen wrench to tighten the set screws. As shown in **FIG 1**
 - **Note:** Position the collars close to the outer targets, but not so tight that they restrict the targets from spinning freely.
3. Slide the stand brackets onto each end of the crossmember and secure with a quick pin on each side.
4. Insert the conduit legs into the stand brackets and secure each leg with a quick pin. **FIG 2**

Assembly Steps: Targets & Spacers Only

1. Cut your conduit (store-bought) to a minimum of 28" (Rimfire) OR 50" (Rifle) for the crossmember and legs.
2. Slide the targets onto the conduit crossmember, separating each with one black spacer. **FIG 1**
3. On each end of the crossmember, slide on a locking collar and use an Allen wrench to tighten the set screws. **FIG 1**
 - **Note:** Position the collars close to the outer targets, but not so tight that they restrict the targets from spinning freely.
4. Slide your stand brackets (customer-supplied) onto each end of the crossmember. **FIG 2**
5. Attach the conduit legs (previously cut) to the stand brackets. **FIG 2**

Contact Us

Still Have Questions?



sales@doubletapind.com



812-274-4130



www.doubletapind.com